



Specifications (Series luminaires)

	Electrical isolation	CIII
	Voltage (V)	12V
Hz	Frecuency (Hz)	50/60Hz
	Power factor (Cos fi)	≥0,9
	Dimming	No

	IP Tightness index	IP68
	Body color	White
	Body	ABS

K	Colour temperature	3000K
	CRI Colour rendering index	>70
	Opening angle	100°

	Measures	457x457x457mm
---	-----------------	---------------

	Operating temperature	-
---	------------------------------	---

	Flux (lm)	1,709lm
---	------------------	---------

	Lifetime	L70B50>50000h
---	-----------------	---------------


	Lifetime	(L70B50>)50.000h
---	-----------------	------------------

	CEE Energy classification	A+
---	----------------------------------	----

References

	W	ϕ		ϕ_{LUM}	K	
498180	22W	$\geq 0,9$	1650mA	1709lm	3000K	457x457x457mm

Dimensions

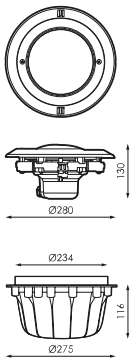

Photometry



Accessories



164122

WIRELESS RGB
SYNCHRONIZER PAR
56



534062

TRANSFORMER
300W 12VAC IP65

Info



Possibility of changing lamps with up pool. Through a rolled up inside the niche cable can remove the lamp out of the water so you can change it without draining the pool. Maximum depth of installation is 2 meters.