





MADE IN SPAIN
Design by PRILUX



Applications



Sports grounds



















Pedestrian Zones

Certifications




Specifications

	Voltage (V)	220-240
Hz	Frecuency (Hz)	50-60
	Current (A)	1.000mA
	LED number	40
	Dimming	No
	IP Tightness index	66
	IK Impact resistance	10
	Diffuser Material	PC-T
	Body	AL iap
K	Colour temperature	4.000K/PCAmbar
	CRI Colour rendering index	>70
	Optical	HEWA020-S033LOM







	Measures	476x479x174
	Weight	17.000Kg
	Wind Resistance	0,169m2
	Operating temperature	-30~+40°C
	Surges protection	Si
	Electrical isolation	CI

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References

		W	W				
501125	2X	120/80	130/92	1.000mA	40	HEWA020-S033LOM	Yes

Photometry

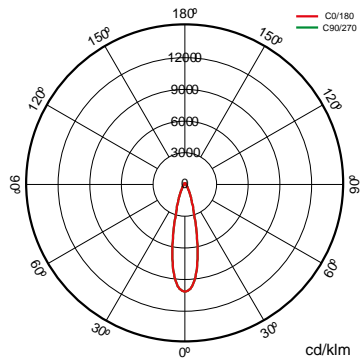

On request



AEXLOM

AINLOM

PEXLOM

PINLOM

S014LOM

S069LOM

S138LOM

S150LOM

Accessories



452311

ACCES. MOBILE FINS
1X120LED HEXAGON



452335

ACCESORIO VISERA
1X120LED HEXAGON



Technologies



Overstorm

Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

Rules



Threephase electrified rail and accessories in white, black and grey. Adapter for three phase track 250V 6A.