


MADE IN SPAIN
Design by PRILUX



Applications



Sports grounds











Pedestrian Zones











Specifications (Series luminaires)





 Voltage (V)	220-240V
Hz Frecuency (Hz)	50-60Hz
 Current (A)	1.000mA
 LED number	60
 Dimming	No

 Measures	633x558x174mm
 Weight	29Kg
 Wind Resistance	0,261m2
 Operating temperature	-30~+40°C

 IP Tightness index	IP66
 IK Impact resistance	IK10
 Body color	9007
 Diffuser Material	PC-T
 Body	AL iap

 Surges protection	Si
 Flux (lm)	23.178/8.817lm
 Electrical isolation	CI

K Colour temperature	4.000K/PCAmbar
 CRI Colour rendering index	>70
 Optical	S033L0M

 Lifetime	L90B10>66.000h
---	----------------











Prilux guarantees a ± 10% tolerance in light flux measurements.

Dimensions




References



									
501132	3X	180/120	195/138W	1000mA	26.085/9.696l m	23.178/8.817l m	60	HEWA020- S033L0M	No

Photometry

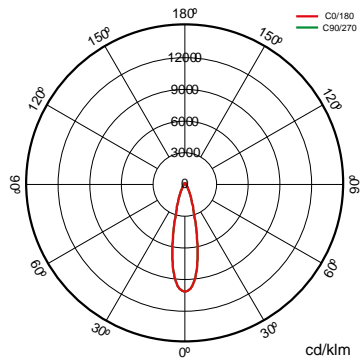

On request



AEXLOM

AINLOM

PEXLOM

PINLOM

S014LOM

S069LOM

S138LOM

S150LOM

Accessories



452311

ACCES. MOBILE FINS
1X120LED HEXAGON



452335

ACCESORIO VISERA
1X120LED HEXAGON



Technologies



Temperature evacuation skin system



TESS



The TESS (Temperature Evacuation Skin System) surface treatment technology is based on a mechanical microcompaction of the material surface that enhances thermal dissipation, improving the results obtained with lacquer-based surface treatments.



Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.