





MADE IN SPAIN
Design by PRILUX



Applications



Sports grounds











Pedestrian Zones



Certifications






Specifications


	Voltage (V)	220-240
Hz	Frequency (Hz)	50-60
	Current (A)	1.000mA
	LED number	60
	Dimming	No


	IP Tightness index	66
	IK Impact resistance	10
	Diffuser Material	PC-T
	Body	AL iap

K	Colour temperature	4.000K/PCAmbar
	CRI Colour rendering index	>70
	Optical	HEWA020-S033LOM

	Measures	633x558x174
	Weight	29.000Kg
	Wind Resistance	0,261m2


	Operating temperature	-30~+40°C
---	------------------------------	-----------

	Surges protection	Si
---	--------------------------	----







	Electrical isolation	CI
---	-----------------------------	----

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References

		W	W				
501132	3X	180/120	195/138	1.000mA	60	HEWA020-S033LOM	No

Photometry

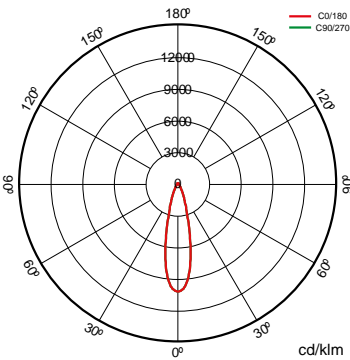

On request




AEXLOM
AINLOM
PEXLOM
PINLOM
S014LOM
S069LOM
S138LOM
S150LOM

Accessories



452311

ACCES. MOBILE FINS
1X120LED HEXAGON



452335

ACCESORIO VISERA
1X120LED HEXAGON

Technologies



Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

Rules



Threephase electrified rail and accessories in white, black and grey. Adapter for three phase track 250V 6A.