


















## Specifications (Series luminaires)


|   |                                   |                  |
|---|-----------------------------------|------------------|
|    | <b>Electrical isolation</b>       | CCI              |
|    | <b>Voltage (V)</b>                | 220-240V         |
| <b>Hz</b>   | <b>Frecuency (Hz)</b>             | 50-60Hz          |
|    | <b>Power factor (Cos fi)</b>      | >0,9             |
|    | <b>IP Tightness index</b>         | IP65             |
|    | <b>IK Impact resistance</b>       | IK06             |
|    | <b>Body color</b>                 | RAL7045          |
|    | <b>Diffuser Material</b>          | VT-T             |
|    | <b>Body</b>                       | Al               |
| <b>K</b>  | <b>Colour temperature</b>         | 3000K            |
|  | <b>CRI Colour rendering index</b> | >80              |
|  | <b>Opening angle</b>              | 100°             |
|  | <b>Measures</b>                   | 240x180x30mm     |
|  | <b>Mounting position</b>          | Superficie       |
|  | <b>Flux (lm)</b>                  | 4516lm           |
|  | <b>Lifetime</b>                   | (L70B50>)25.000h |
|  | <b>Lifetime</b>                   | (L70B50>)25.000h |

**References**



|  | W   | $\phi_{LUM}$ | K     |  |  |
|---|-----|--------------|-------|---|---|
| <b>504690</b>   | 50W | 4516lm       | 3000K | Dark gray   | 240x180x30mm  |

**Dimensions**

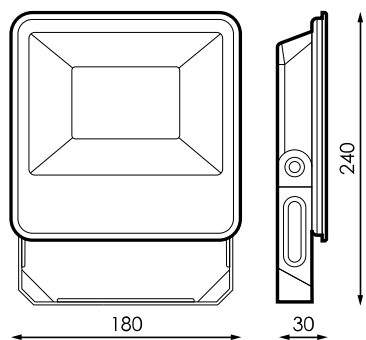

**Photometry**



**Info**



Hasta fin de existencias