















Specifications (Series luminaires)




	Electrical isolation	CI
	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	>0,9
	IP Tightness index	IP65
	Body color	7045
	Diffuser Material	VT-O
	Body	AL
K	Colour temperature	3.000K
	CRI Colour rendering index	>80
	Opening angle	110°
	Measures	240x180x30mm
	Flux (lm)	4.371lm
	Lifetime	(L70B50>) 25.000h

References



	W	ϕ_{LUM}	K		
504690	50W	4.371lm	3.000K	Dark gray	240x180x30mm

Dimensions

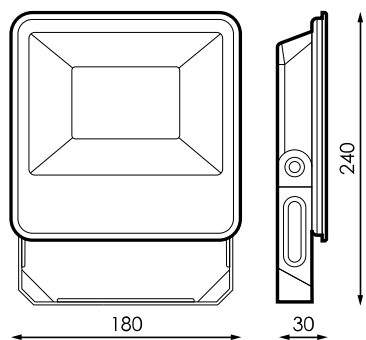

Photometry

