


















Specifications (Series luminaires)


| | | |
|---|-----------------------------------|------------------|
|  | Electrical isolation | CCI |
|  | Voltage (V) | 220-240V |
| Hz | Frecuency (Hz) | 50-60Hz |
|  | Power factor (Cos fi) | >0,9 |
|  | IP Tightness index | IP65 |
|  | IK Impact resistance | IK06 |
|  | Body color | RAL7045 |
|  | Diffuser Material | VT-T |
|  | Body | Al |
| K | Colour temperature | 5000K |
|  | CRI Colour rendering index | >80 |
|  | Opening angle | 100° |
|  | Measures | 287x243x37mm |
|  | Mounting position | Superficie |
|  | Flux (lm) | 6318lm |
|  | Lifetime | (L70B50>)25.000h |
|  | Lifetime | (L70B50>)25.000h |

References



| | W | ϕ_{LUM} | K | | |
|--------|-----|--------------|-------|-----------|--------------|
| 504720 | 70W | 6318lm | 5000K | Dark gray | 287x243x37mm |

Dimensions

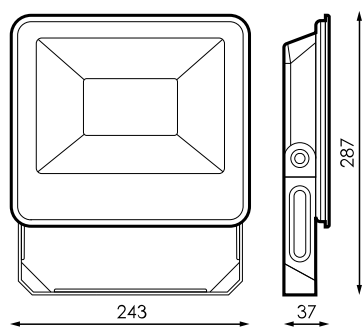

Photometry



Info



Hasta fin de existencias