




















Specifications (Series luminaires)


	Electrical isolation	CI
	Voltage (V)	220-240V
	Frecuency (Hz)	Hz
	IP Tightness index	IP65
	IK Impact resistance	IK06
	Body color	7045
	Diffuser Material	VT-T
	Body	AL
	Colour temperature	5.000K
	CRI Colour rendering index	≥80
	Opening angle	110°
	Measures	313x243x37mm
	Mounting position	Superficie
	Operating temperature	-30 +50
	Flux (lm)	8839lm
	Lifetime	25.000h

References



	W	ϕ_{LUM}	K		
504744	100W	8839lm	5.000K	Dark gray	313x243x37mm

Dimensions

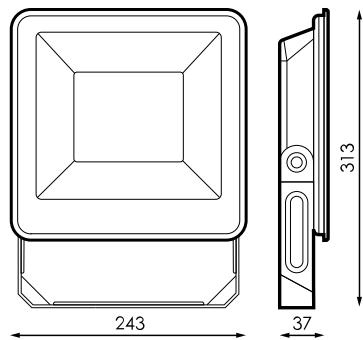

Photometry

