



MADE IN SPAIN  
Design by PRILUX



## Applications




Facades



Industrial




Car parks



Sports grounds



Monuments




















Industrial Zones

## Certifications




## Specifications (Series luminaires)

|                                                                                    |                                   |             |
|------------------------------------------------------------------------------------|-----------------------------------|-------------|
|    | <b>Voltage (V)</b>                | 220-240V    |
| Hz                                                                                 | <b>Frecuency (Hz)</b>             | 50-60Hz     |
|    | <b>Current (A)</b>                | 350mA       |
| $\phi$                                                                             | <b>Power factor (Cos fi)</b>      | 0.93        |
|    | <b>LED number</b>                 | 108         |
|    | <b>Dimming</b>                    | No          |
|    | <b>IP Tightness index</b>         | IP66        |
|    | <b>IK Impact resistance</b>       | IK09        |
|    | <b>Body color</b>                 | 9007        |
|    | <b>Body</b>                       | AL iap      |
| K                                                                                  | <b>Colour temperature</b>         | 4000K       |
|  | <b>CRI Colour rendering index</b> | 70cromatica |
|  | <b>Optical</b>                    | S090I2P     |






|                                                                                     |                              |                 |
|-------------------------------------------------------------------------------------|------------------------------|-----------------|
|    | <b>Measures</b>              | 500x250x55mm    |
|    | <b>Weight</b>                | 5.75Kg          |
|    | <b>Wind Resistance</b>       | 0,11m2          |
|    | <b>Operating temperature</b> | 50°C            |
|    | <b>Surges protection</b>     | No              |
| $\phi_{LUM}$                                                                        | <b>Flux (lm)</b>             | 6270lm          |
|    | <b>Electrical isolation</b>  | CCI             |
|  | <b>Lifetime</b>              | L70B10>100.000h |

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.


## Dimensions




## References

|                                                                                     |           |     |                                                                                     |        |              |              |          |                                                                                       |                                                                                       |                                                                                       |
|-------------------------------------------------------------------------------------|-----------|-----|-------------------------------------------------------------------------------------|--------|--------------|--------------|----------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  | $W_{LED}$ | W   |  | $\phi$ | $\phi_{LED}$ | $\phi_{LUM}$ | $\phi/W$ |  |  |  |
| <b>519878</b>                                                                       | 35W       | 38W | 350mA                                                                               | 7312lm | 7207lm       | 6270lm       | 165lm/W  | 108                                                                                   | S090I2P                                                                               | No                                                                                    |

**Photometry**

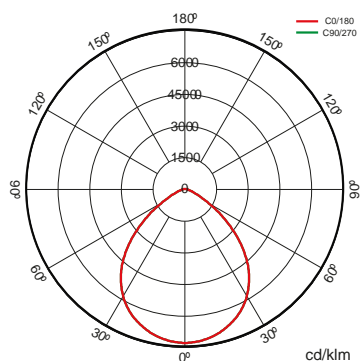

**On request**



Class II




Double Level with Line of Command



Available RAL colors (Consult)

5N



>70 2.700K

>70 5.000K

>80 3.000K

>80 4.000K

>80 4.000K

>70 2.700K



S025I2P



S055I2P

VA11I2P

VA12I2P

**Light packages**



|            |                                                                                   |                                                                                   | PCA                   | 722                   | 727                   | 730                   | 827                   | 830                   | 840                   |
|------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| W          |  |  | $\phi_{LUM}$ $\phi/W$ | $\phi_{LUM}$ $\phi/W$ | $\phi_{LUM}$ $\phi/W$ | $\phi_{LUM}$ $\phi/W$ | $\phi_{LUM}$ $\phi/W$ | $\phi_{LUM}$ $\phi/W$ | $\phi_{LUM}$ $\phi/W$ |
| <b>38W</b> | 108                                                                               | 350mA                                                                             |                       |                       |                       |                       | 5.305lm 140lm/W       | 5.546lm 146lm/W       | 6.028lm 159lm/W       |

**Accessories**



**515788**

ACCESSORY  
PARALUMEN  
NANTES RAL9005T



## **Cora Manager**

---

### **description**



Lighting management in the electrical panel that allows group control of the luminaires connected to the control center via the power line (CMR) without additional wiring

---

### **Info**



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)