

MADE IN SPAIN
Design by PRILUX




Applications



Monuments



Industrial



Sports grounds



Facades



Car parks




















Industrial Zones

Certifications




Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	1.000mA
ϕ	Power factor (Cos fi)	0.97
	LED number	192
	Dimming	No
	IP Tightness index	IP66
	IK Impact resistance	IK09
	Body color	9007
	Body	AL iap
K	Colour temperature	4000K
	CRI Colour rendering index	70cromatica
	Optical	S090I2P






	Measures	560x300x56mm
	Weight	7.8Kg
	Wind Resistance	0,168m2
	Operating temperature	40°C
	Surges protection	No
ϕ_{LUM}	Flux (lm)	27500lm
	Electrical isolation	CCI
	Lifetime	L70B10>100.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

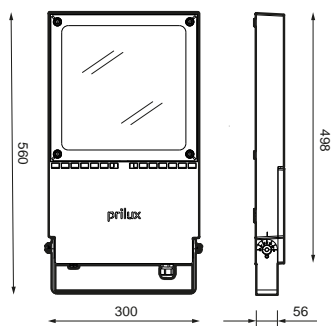
Dimensions



References

	W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}	ϕ/W			
520034	189W	203,7W	1000mA	32884lm	31084lm	27500lm	135lm/W	192	S090I2P	No

Photometry

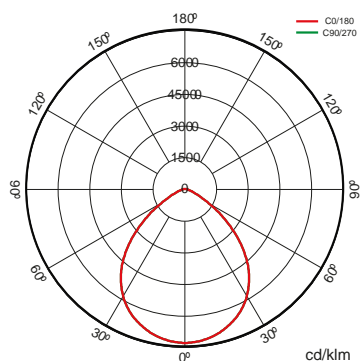

On request



Class II



Double Level with Line of Command



Available RAL colors (Consult)

5N

K

>70 2.700K

>70 5.000K

>80 3.000K

>80 4.000K

>80 4.000K

>70 2.700K



S025I2P

S055I2P

VA11I2P

VA12I2P

Light packages



			PCA	722	727	730	827	830	840
W			ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W
203,7W	192	1.000mA					23.269lm 114lm/W	24.327lm 119lm/W	26.442lm 130lm/W

Accessories



515818

NANTES L LUMEN
ACCESSORY
RAL9005T

Solutions

S



Cora Manager

description



Lighting management in the electrical panel that allows group control of the luminaires connected to the control center via the power line (CMR) without additional wiring

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es