
















Specifications (Series luminaires)

	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	0.9
	Dimming	DALI
	IP Tightness index	IP65
	IK Impact resistance	IK07
	Body color	White
	Diffuser Material	PC-O
	Body	PC
K	Colour temperature	4.000K / 6.500K
	CRI Colour rendering index	>80
	Measures	1.500x84x71mm
	Weight	1.71Kg
	Operating temperature	-10°C~+35 °C
Φ_{LUM}	Flux (lm)	6.534/6.858lm
	Electrical isolation	CII
	Lifetime	(L70B50>) 50.000h




References




	W_{LED}	W	ϕ_{LED}	ϕ_{LUM}	K		
521055	60W	57W	7.965/8.364lm	6.534/6.858lm	4.000K / 6.500K	>80	1.500x84x71mm

Dimensions

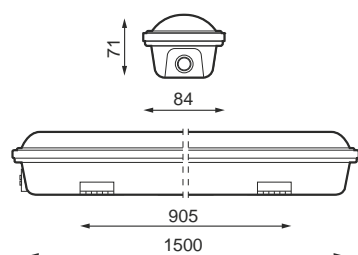

Photometry

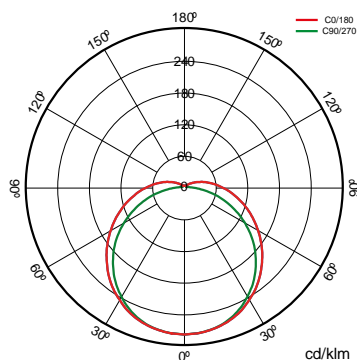

Info



Not suitable for your exposure to uva rays.



Solutions

S



Cora Industry

description




Cora Industry LITE is the new standalone lighting control system, which is ideal for any industrial installation. With simple, quick, intuitive installation, Cora Industry Lite represents a turning point in development in the industry, providing renewal, control and full management of lighting in factories and warehouses. It has a built-in light sensor, regulates the flux emitted by the luminaires to compensate for the contribution from natural light and achieves optimal energy use by continually monitoring the light level to adjust the luminaires to the levels set.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info 

Connecteur rapide.