











Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	>0,9
	Dimming	No
	Bushing type	E40
	IP Tightness index	IP64
K	Colour temperature	6.500K
	CRI Colour rendering index	>80
	Opening angle	330°
	Measures	90x251mm
	Operating temperature	-10°C~+35 °C
Φ_{LUM}	Flux (lm)	6.089lm
	Lifetime	(L70B50>) 50.000h
	CEE Energy classification	E




References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
521468	45W	>0,9	6.089lm	6.500K	90x251mm

Dimensions

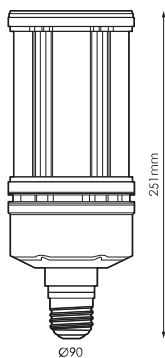

Photometry



Info



The working ambient temperature can not exceed 50°C in any case, therefore, it is not advisable to use these bulbs in closed luminaires where these temperatures can be overcome, since the useful life of the product can be significantly reduced. Lack of ventilation or sufficient air volume raises the temperature above the limits of product use.