

















Specifications (Series luminaires)




	Electrical isolation	CI
	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	>0,9
	IP Tightness index	IP65
	Body color	White
	Diffuser Material	VT-O
	Body	AL
K	Colour temperature	5.000K
	CRI Colour rendering index	>80
	Opening angle	110°
	Measures	240x180x30mm
	Flux (lm)	4.516lm
	Lifetime	(L70B50>) 25.000h

References



	W	ϕ_{LUM}	K		
522540	50W	4.516lm	5.000K	White	240x180x30mm

Dimensions

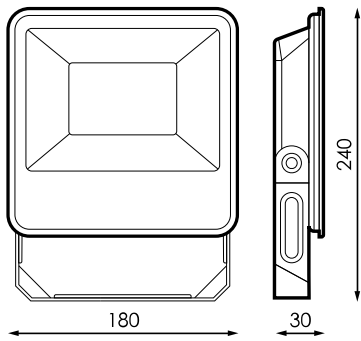

Photometry

