


MADE IN SPAIN
Design by PRILUX




Applications



Sports grounds



Industrial Zones



Signage

Certifications





Specifications

	Voltage (V)	220-240
	Frequency (Hz)	50-60
	Current (A)	3.800mA
	LED number	288

	Measures	471x366x463
	Weight	20.000Kg
	Wind Resistance	0,169m ²
	Operating temperature	-30~+40°C

	IP Tightness index	66
	Diffuser Material	VT-T
	Body	AL iap


	Surges protection	No
	Flux (lm)	70.964
	Electrical isolation	CI

	Colour temperature	5.000K
	CRI Colour rendering index	>70
	Optical	HEMU288-S030L2P

	Dimensions	471x366x463
	Electrical isolation	CI

Prilux guarantees a ± 10% tolerance in light flux measurements.

Dimensions

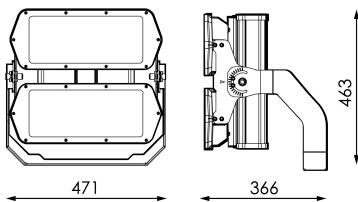


References

	W	W		ϕ_{LED}	ϕ_{LUM}	ϕ/W			
524124	500W	546W	3.800mA	82.05	70.964	130W	288	HEMU288-S030L2P	Yes



Photometry

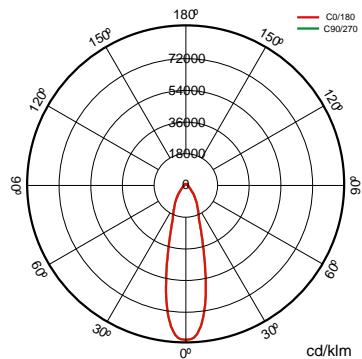

On request

**K**

PC-T (IK10)

>70 3.000K

S020I2P

>80 3.000K

S090I2P



Technologies



Overstorm

Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

SYSTEMSHIELD



SystemShield

SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.

Rules



Three-phase electrified rail and accessories in white, black and grey. Adapter for three phase track 250V 6A.



Warning

You need DALI drive



Solutions

S



Cora Sport

description



CORA SPORTS is the family of devices by Priluxto control DALI light fixtures in new or existing installations, indoors or outdoors, using Bluetooth5.0 wireless technology. Technology that is more efficient and easier to deploy and scale for professional lighting applications. It can work in a meshed arrangement with the light fixtures and to create smart communication networks. Especially recommended in installations with towers and/or groups of light fixtures to make it possible to operate them as a group or individually.



Cora Industry

description



Cora Industry LITE is the new standalone lighting control system, which is ideal for any industrial installation. With simple, quick, intuitive installation, Cora Industry Lite represents a turning point in development in the industry, providing renewal, control and full management of lighting in factories and warehouses. It has a built-in light sensor, regulates the flux emitted by the luminaires to compensate for the contribution from natural light and achieves optimal energy use by continually monitoring the light level to adjust the luminaires to the levels set.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.grupoprilux.com