



## Specifications (Series luminaires)




|  |                                   |                   |
|--|-----------------------------------|-------------------|
|  | <b>Voltage (V)</b>                | 230V              |
|  | <b>Frecuency (Hz)</b>             | 50-60Hz           |
|  | <b>Power factor (Cos fi)</b>      | >0,5              |
|  | <b>Dimming</b>                    | No                |
|  | <b>Bushing type</b>               | E14               |
|  | <b>IP Tightness index</b>         | IP20              |
|  | <b>Colour temperature</b>         | 5.000K            |
|  | <b>CRI Colour rendering index</b> | >80               |
|  | <b>Opening angle</b>              | 240°              |
|  | <b>Measures</b>                   | 45x78mm           |
|  | <b>Operating temperature</b>      | -5°C~+35 °C       |
|  | <b>Flux (lm)</b>                  | 511lm             |
|  | <b>Lifetime</b>                   | (L70B50>) 15.000h |
|  | <b>CEE Energy classification</b>  | F                 |

## References



|  | W  | $\phi$ | $\phi_{LUM}$ | K      | $\leftrightarrow$ |
|---|----|--------|--------------|--------|-------------------|
| 524735  | 5W | >0,5   | 511lm        | 5.000K | 45x78mm           |

## Dimensions

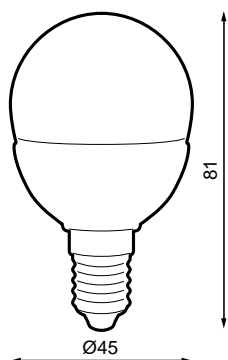

## Photometry

