



















## Specifications (Series luminaires)


	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
$\Phi$	<b>Power factor (Cos fi)</b>	0.9
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP65
	<b>IK Impact resistance</b>	IK07
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	PC
K	<b>Colour temperature</b>	4.000K
	<b>CRI Colour rendering index</b>	>80
	<b>Measures</b>	1.200x84x71mm
	<b>Weight</b>	1.32Kg
	<b>Operating temperature</b>	-10°C~+35 °C
$\Phi_{LUM}$	<b>Flux (lm)</b>	4.418lm
	<b>Electrical isolation</b>	CII
	<b>Lifetime</b>	(L70B50>) 30.000h

**References**




	$W_{LED}$	W	$\phi_{LED}$	$\phi_{LUM}$	K		
<b>534512</b>	40W	37W	5.4211m	4.4181m	4.000K	>80	1.200x84x71mm

**Dimensions**

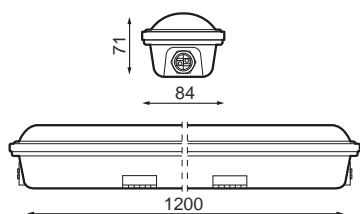

**Photometry**

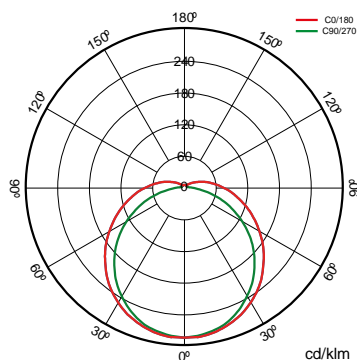

**Info**



Not suitable for your exposure to uva rays.

**Info**



Quick connector. Fastening clip. Serial connection: 18W:  
32luminaires 37W: 20luminaires 57W: 13luminaires