



















Specifications (Series luminaires)


	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	0.9
	Dimming	No
	IP Tightness index	IP65
	IK Impact resistance	IK07
	Body color	White
	Diffuser Material	PC-O
	Body	PC
K	Colour temperature	4.000K
	CRI Colour rendering index	>80
	Measures	1.500x84x71mm
	Weight	1.71Kg
	Operating temperature	-10°C~+35 °C
Φ_{LUM}	Flux (lm)	6.534lm
	Electrical isolation	CII
	Lifetime	(L70B50>) 30.000h

References




	W_{LED}	W	ϕ_{LED}	ϕ_{LUM}	K		
534536	60W	57W	7.965lm	6.534lm	4.000K	>80	1.500x84x71mm

Dimensions

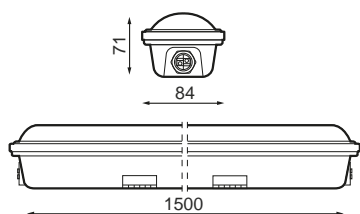

Photometry

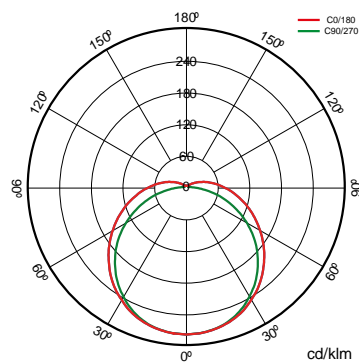

Info



Not suitable for your exposure to uva rays.

Info



Quick connector. Fastening clip. Serial connection: 18W:
32luminaires 37W: 20luminaires 57W: 13luminaires