















Specifications (Series luminaires)

	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	$\geq 0,9$
	Dimming	No
	IP Tightness index	IP65
	IK Impact resistance	IK07
	Body color	White
	Diffuser Material	PC-O
	Body	PC
K	Colour temperature	4000K
	CRI Colour rendering index	80cromatica
	Measures	1.500x84x71mm
	Weight	1.71Kg
Φ_{LUM}	Flux (lm)	6793lm
	Electrical isolation	CCII
	Lifetime	(L70B50>)30.000h




References




	W _{LED}	W	φ _{LED}	φ _{LUM}	K		
534536	46W	50W	7998lm	6793lm	4000K	80cromatica	1.500x84x71mm

Dimensions

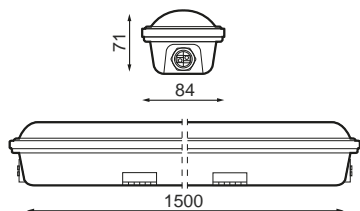

Photometry

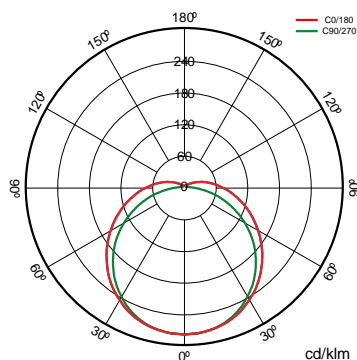

Info



No apto para su exposición a rayos uva.

Info



Conector rápido. Clip de fijación. Conexión en serie: 18W: 32 luminarias 37W: 20 luminarias 57W: 13 luminarias