




Specifications (Series luminaires)		
	Electrical isolation	CII
	Voltage (V)	230V
	Frecuency (Hz)	50/60Hz
	Power factor (Cos fi)	≥0,9
	Dimming	No
	IP Tightness index	IP65
	IK Impact resistance	IK07
	Body color	White
	Diffuser Material	PC-O
	Body	PC
	Colour temperature	6500K
	CRI Colour rendering index	>80
	Measures	1.500x84x71mm
	Operating temperature	-
	Flux (lm)	6,858lm
	Lifetime	(L70B50>)30.000h


References

		W_{LED}	W	ϕ_{LED}	ϕ_{LUM}	K		
	534543	46W	50W	8116lm	6858lm	6500K	80	1.500x84x71mm

Dimensions

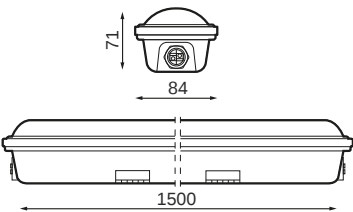

Photometry

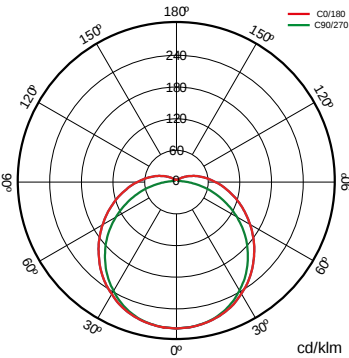

Info

No apto para su exposición a rayos uva.

Info



Conector rápido. Clip de fijación. Conexión en serie: 18W: 32 luminarias 37W: 20 luminarias 57W: 13 luminarias