















Specifications (Series luminaires)


| | | |
|---|-----------------------------------|-------------------|
|  | Electrical isolation | CI |
|  | Voltage (V) | 230V |
| Hz | Frecuency (Hz) | 50-60Hz |
|  | IP Tightness index | IP65 |
|  | Body color | Canvas grey |
|  | Diffuser Material | PC-P |
|  | Body | AL |
| K | Colour temperature | 3.000K |
|  | CRI Colour rendering index | >80 |
|  | Opening angle | 100° |
|  | Measures | 158x134x28mm |
|  | Operating temperature | -5°C~+35 °C |
|  | Flux (lm) | 1.438lm |
|  | Lifetime | (L70B50>) 25.000h |

References



|  | W | ϕ_{LUM} | K |  |  |
|---|-----|--------------|--------|---|---|
| 534574 | 20W | 1.438lm | 3.000K | Canvas gray | 158x134x28mm |

Dimensions

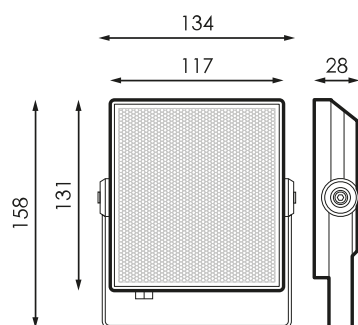

Photometry



Info



Until end of stock