





**MADE IN SPAIN**  
Design by PRILUX



## Applications



Offices



Classrooms



Retail



Home



Large surfaces



Hotels
















Restaurants



Health care


## Specifications (Series luminaires)

	<b>Voltage (V)</b>	220-240V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Current (A)</b>	390mA
$\phi$	<b>Power factor (Cos fi)</b>	0.93
	<b>LED number</b>	72
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP20
	<b>Body color</b>	9006
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	AL
K	<b>Colour temperature</b>	4.000K
	<b>CRI Colour rendering index</b>	>80




	<b>Measures</b>	1.136x60x80mm
	<b>Mounting position</b>	Superficie/Suspendido
$\phi_{LUM}$	<b>Flux (lm)</b>	2.400lm
	<b>Electrical isolation</b>	CI
	<b>Lifetime</b>	L70>50.000h

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.


## Dimensions

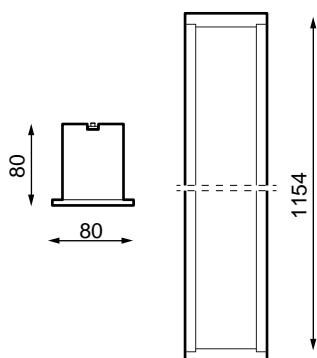


## References

	$W_{LED}$	W		$\phi_{LED}$	$\phi_{LUM}$	K	
538121	30W	32W	390mA	3.945lm	2.400lm	4.000K	1.136x60x80mm

**Photometry**

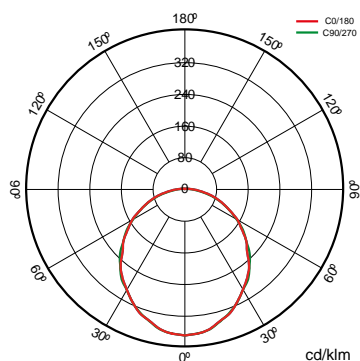

**On request**




Presence and brightness sensor (mod.  
1x/2x 1.200mm/1.500mm)



Dali

Bluetooth



WAS(\*Not compatible for 37W luminaires)

>80 3.000K

>80 4.000K

>80 4.000K



Available RAL colors (Consult)

## Accessories



**207638**

TRANS POWER  
CABLE 3X0.75 1M 1PC



**538237**

ACCESORIO  
SUPERFICIE LYNX



**538244**

ACCESORIO  
SUSPENSION LYNX



**537933**

ADJUSTABLE  
POWER CABLE  
TRANS 5X0.75 1M 1PC



**Solutions**

S



**CTE Pack**

**description**



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



**CLASSROOMS Pack**

**description**



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



**Was Indoor**

**description**



The WAS INDOOR solution is specifically aimed at increasing the well-being of users in places such as hospitals, nursing homes, wellness centres, classrooms and offices. The circadian lighting is applied in workplaces to improve visual conditions, comfort and the workers' performance, resulting in a higher productivity and a better development of the company.



**Bluetooth package**

**description**



Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

**Info**



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)