

















## Specifications (Series luminaires)

	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Dimming</b>	Yes
	<b>Bushing type</b>	GU10
	<b>Body color</b>	White
	<b>Body</b>	PC
	<b>CRI Colour rendering index</b>	300cromatica
	<b>Opening angle</b>	100°
	<b>Measures</b>	50x58mm
	<b>Operating temperature</b>	-5°C~+35 °C
	<b>Flux (lm)</b>	578lm
	<b>Lifetime</b>	25.000h
	<b>Lifetime</b>	(L70B50>)25.000h
	<b>N° of ignitions</b>	15.000
	<b>CEE Energy classification</b>	A+

## References

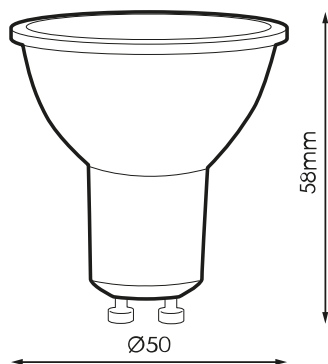


	W	$\phi_{LUM}$	
545457	6,5W	578lm	50x58mm

## Dimensions



## Photometry



---

**Accessories**

---



---

**974851**

---

GU10/GZ10  
LAMPHOLDER WITH  
SILICONE CABLE