



Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	230V
Hz	Frequency (Hz)	50/60Hz
	Power factor (Cos fi)	>0,5
	Dimming	TRIAC

	Bushing type	GU10
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-O
	Body	PC

K	Colour temperature	4000K
	CRI Colour rendering index	>80
	Opening angle	100°

	Measures	50x50x58mm
---	-----------------	------------

	Operating temperature	-5°C ~ +35°C
---	------------------------------	--------------

	Flux (lm)	611lm
---	------------------	-------


	Lifetime	(L70B50>)25.000h
	Lifetime	(L70B50>)25.000h
	N° of ignitions	50.000

	CEE Energy classification	A+
---	----------------------------------	----

References					
	W	ϕ	ϕ_{LUM}	K	$\leftrightarrow$
545464	7W	>0,5	611lm	4000K 4000K	50x50x58mm

Dimensions

Photometry

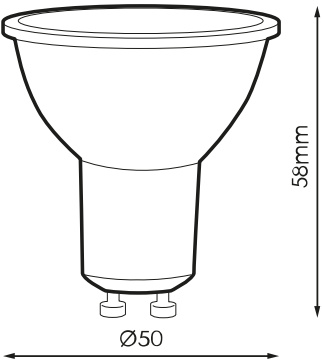

Accessories



974851

GU10/GZ10
LAMPHOLDER WITH
SILICONE CABLE