
















Applications




Specifications (Series luminaires)

	Voltage (V)	220-240V
	LED number	32
	Dimming	No
	Comm. Prot. for reprogr.	CMR
	IK Impact resistance	IK09
K	Colour temperature	4000k,Âmbar
	Optical	VAOP



	Measures	445x855mm
	Wind Resistance	0,31m2
	Mounting	Arm Mount,Crosier Mount
	Operating temperature	-30 +35
	Electrical isolation	CI
	Lifetime	L90 B10 >200.000h
	Efficacy	lm/W

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

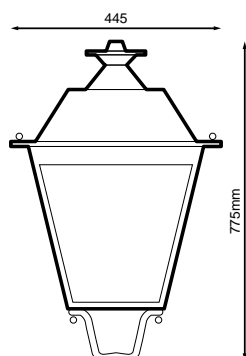
Dimensions



References

	W		K
549400	40W	32	4000k,Âmbar

Mounting

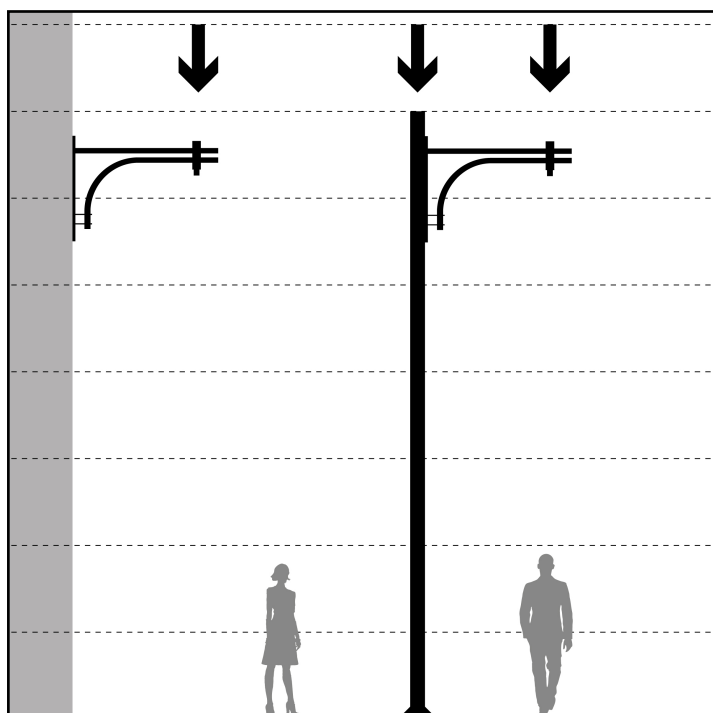

1. Arm Mount
2. Crosier Mount

Accessories



594851

ADAPTER KIT TO
POST Ø33MM
IRCANA RAL9005T



594868

ADAPTER KIT TO
POST Ø42MM
IRCANA RAL9005T



594875

ADAPTER KIT TO
POST Ø50MM
IRCANA RAL9005T



594882

ADAPTER KIT TO
POST Ø76MM
IRCANA RAL9005T

Accessories



503372

ADAPTER Ø60MM
IRCANA RAL9005T

Technologies



CMR



CMR (CORA MANAGER READY) identifies the prilux luminaires compatible with the CORA MANAGER system that provides the luminaires with control, regulation and programming.

Solutions

S



Was Outdoor

description



WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature, CCT. WAS (White Adaptive System) technology provides PRILUX luminaires with the ability to change both the amount of light they provide and the correlated color temperature

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es