
















## Specifications (Series luminaires)

	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50Hz
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP20
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	FE
K	<b>Colour temperature</b>	4.000K
	<b>CRI Colour rendering index</b>	≥80
	<b>Opening angle</b>	120°
	<b>Measures</b>	Ø400x850mm
	<b>Mounting position</b>	Suspendido
	<b>Operating temperature</b>	-5 +40
	<b>Flux (lm)</b>	2947lm
	<b>Electrical isolation</b>	CII
	<b>Lifetime</b>	(L70B50>) 40.000h


References 

	$W_{LED}$	W		$\phi_{LED}$	$\phi_{LUM}$	K	
552356	32W	35W	850mA	3578lm	2947lm	4.000K	No

Dimensions 

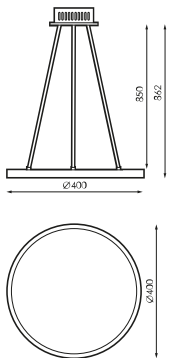


Photometry 

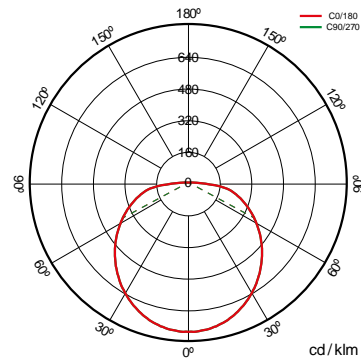

---

**On request**

---



Dali

---

---

Solutions

---

S



## Bluetooth package

---

description 

---

Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

---

Info 

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)