















Specifications (Series luminaires)


	Voltage (V)	230V
Hz	Frecuency (Hz)	50Hz
	Dimming	No
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-O
	Body	FE
K	Colour temperature	3.000K
	CRI Colour rendering index	≥80
	Opening angle	120°
	Measures	Ø600x850mm
	Mounting position	Suspendido
	Operating temperature	-5 +40
	Flux (lm)	2911lm
	Electrical isolation	CII
	Lifetime	(L70B50>) 40.000h

References




	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	K	
552363	32W	35W	850mA	3507lm	291lm	3.000K	No


Dimensions

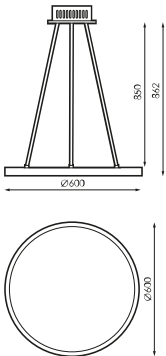

Photometry

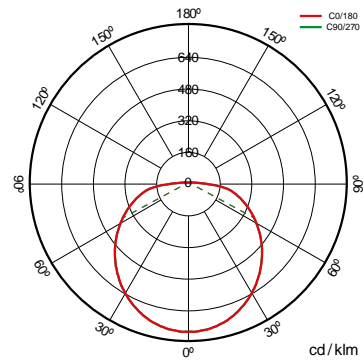

On request



Dali

Solutions

S



Bluetooth package

description 

Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info 

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es