



MADE IN SPAIN
Design by PRILUX



Applications



Sports grounds



Industrial Zones


















Signage

Certifications











Specifications

 Voltage (V)	220-240	 Measures	471x366x463
Hz Frecuency (Hz)	50-60	 Operating temperature	-30~+35°C
 Current (A)	4.800mA	 Surges protection	No
 LED number	288	 Flux (lm)	82.76
 Dimming	No	 Electrical isolation	CI
 IP Tightness index	66	 Lifetime	L90B10>200.000h
 Diffuser Material	VT		
 Body	AL iap		
K Colour temperature	4.000K		
 CRI Colour rendering index	>70		
 Optical	HEMA288-S060L2P		


Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions

References

		W	W				ϕ/W			
562171	2X	635W	688W	4.800mA	97.689	82.76	120W	288	HEMA288-S060L2P	Yes

Photometry

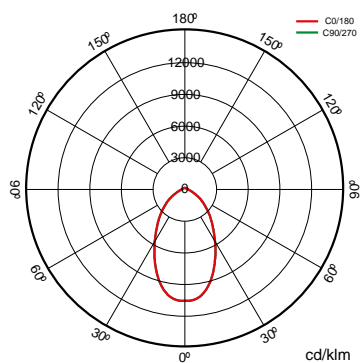

On request



PC-T (IK10)

S020I2P

S090I2P

K

>70 3.000K

>80 3.000K



Technologies



Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

SystemShield



SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.

Rules



Threephase electrified rail and accessories in white, black and grey. Adapter for three phase track 250V 6A.

Warning



You need DALI drive



Solutions

S



Cora Sport

description



CORA SPORTS is the family of devices by Prilux to control DALI light fixtures in new or existing installations, indoors or outdoors, using Bluetooth 5.0 wireless technology. Technology that is more efficient and easier to deploy and scale for professional lighting applications. It can work in a meshed arrangement with the light fixtures and to create smart communication networks. Especially recommended in installations with towers and/or groups of light fixtures to make it possible to operate them as a group or individually.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.grupoprilux.com