





MADE IN SPAIN
Design by PRILUX



Applications



Sports grounds














Signage

Certifications




Specifications (Series luminaires)

	Voltage (V)	220-400V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	4.800mA
	Dimming	No
	IP Tightness index	IP66
K	Colour temperature	4000K
	CRI Colour rendering index	70cromatica




	Measures	471x366x463mm
	Surges protection	No
	Flux (lm)	84470lm
	Electrical isolation	CCI
	Lifetime	L90B10>200000h
	Lifetime	L90B10>200.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions

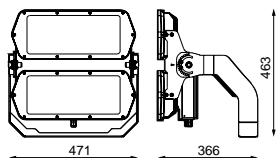

References


	W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}	ϕ/W	
562201	635W	688W	4800mA	-lm	97689lm	84470lm	123lm/W	No

Photometry

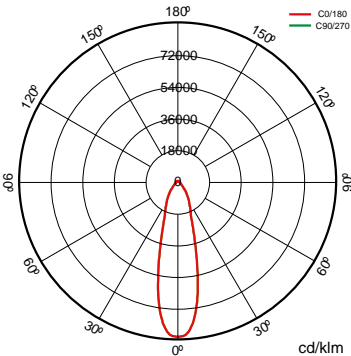

On request





PC-T (IK10)

K

>70 3.000K

>80 3.000K



S090I2P

S020I2P