



MADE IN SPAIN
Design by PRILUX



Applications



Sports grounds



Industrial Zones




















Signage

Certifications











Specifications

 Voltage (V)	220-240	 Measures	471x683x366
Hz Frecuency (Hz)	50-60	 Operating temperature	-30~+35°C
 Current (A)	6.600mA	 Surges protection	No
 LED number	432	 Flux (lm)	118.758
 Dimming	No	 Electrical isolation	CI
 IP Tightness index	66	 Lifetime	L90B10>200.000h
 Diffuser Material	VT	Colour temperature	4.000K
 Body	AL iap	 CRI Colour rendering index	>70
Colour temperature	4.000K	 Optical	HEMA432-S030L2P
 CRI Colour rendering index	>70		
 Optical	HEMA432-S030L2P		


Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions

References

		W	W				ϕ/W			
562270	3X	900W	977W	6.600mA	140.19	118.758	122W	432	HEMA432-S030L2P	Yes

Photometry

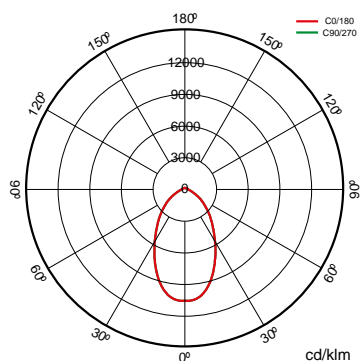

On request



PC-T (IK10)

S020I2P

S090I2P

K

>70 3.000K

>80 3.000K



Technologies



Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

SystemShield



SYSTEMSHIELD technology is designed to guarantee the hours of useful life of luminaires installed in environments where exceeding the maximum operating temperature is possible and even probable. Using thermal probes, the luminaire knows its operating temperature at all times.

Rules



Threephase electrified rail and accessories in white, black and grey. Adapter for three phase track 250V 6A.

Warning



You need DALI drive



Cora Sport

description

CORA SPORTS is the family of devices by Prilux to control DALI light fixtures in new or existing installations, indoors or outdoors, using Bluetooth 5.0 wireless technology. Technology that is more efficient and easier to deploy and scale for professional lighting applications. It can work in a meshed arrangement with the light fixtures and to create smart communication networks. Especially recommended in installations with towers and/or groups of light fixtures to make it possible to operate them as a group or individually.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.grupoprilux.com