




MADE IN SPAIN
Design by PRILUX



Applications




Facades



Industrial Zones



Industrial



Sports grounds



Monuments




















Car parks

Certifications




Specifications (Series luminaires)

| | | |
|--|-----------------------------------|-------------|
|  | Voltage (V) | 220-240V |
| Hz | Frecuency (Hz) | 50-60Hz |
|  | Current (A) | 1.000mA |
| ϕ | Power factor (Cos fi) | 0.98 |
|  | LED number | 300 |
|  | Dimming | No |
|  | IP Tightness index | IP66 |
|  | IK Impact resistance | IK09 |
|  | Body color | 9007 |
|  | Body | AL iap |
| K | Colour temperature | 3000K |
|  | CRI Colour rendering index | 70cromatica |
|  | Optical | S090I2P |






| | | |
|---|------------------------------|-----------------|
|  | Measures | 650x350x60mm |
|  | Weight | 11.5Kg |
|  | Wind Resistance | 0,2m2 |
|  | Operating temperature | 35°C |
|  | Surges protection | No |
| ϕ_{LUM} | Flux (lm) | 44550lm |
|  | Electrical isolation | CCI |
|  | Lifetime | L70B10>100.000h |

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions




References

| | | | | | | | | | | |
|---|-----------|----------|---|---------|--------------|--------------|----------|---|---|---|
|  | W_{LED} | W |  | ϕ | ϕ_{LED} | ϕ_{LUM} | ϕ/W |  |  |  |
| 566681 | 304W | 324,1W | 1000mA | 53357lm | 51207lm | 44550lm | 137lm/W | 300 | S090I2P | No |

Photometry

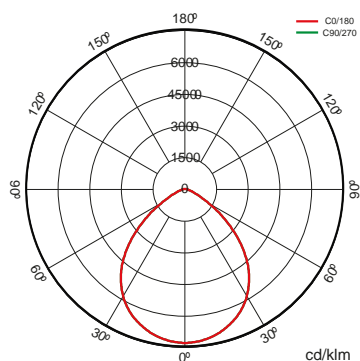

On request



Class II




Double Level with Line of Command



Available RAL colors (Consult)

5N



K

>70 2.700K

>70 5.000K

>80 3.000K

>80 4.000K

>80 4.000K

>70 2.700K



lm

S025I2P



S055I2P

VA11I2P

VA12I2P

Light packages



| | | | PCA | 722 | 727 | 730 | 827 | 830 | 840 |
|---------------|---|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| W |  |  | ϕ_{LUM} ϕ/W | ϕ_{LUM} ϕ/W | ϕ_{LUM} ϕ/W | ϕ_{LUM} ϕ/W | ϕ_{LUM} ϕ/W | ϕ_{LUM} ϕ/W | ϕ_{LUM} ϕ/W |
| 324,1W | 300 | 1.000mA | | | | | 41.252lm 127lm/W | 41.651lm 129lm/W | 32.726lm 101lm/W |

Accessories



515832

ACCESSORY
PARALUMEN
NANTES XL RAL9005T

Solutions

S



Cora Manager

description



Lighting management in the electrical panel that allows group control of the luminaires connected to the control center via the power line (CMR) without additional wiring

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es