














Specifications (Series luminaires)




	Electrical isolation	CCIII
	Voltage (V)	24V
	IP Tightness index	IP20
K	Colour temperature	4000K
	CRI Colour rendering index	90cromatica
	Measures	5.000x10mm
	Mounting position	Superficie
	Lifetime	(L70B50>)50.000h
	Lifetime	(L70B50>)50.000h

References



	W	K		
568678	24,5W	4000K	90cromatica	5.000x10mm

Dimensions

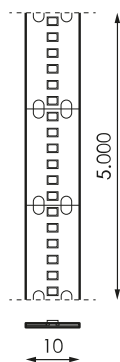

Photometry

