Hexagon Arena

574723

PRILUX

MADE IN SPAIN
Design by PRILUX



Applications

Sports grounds

Certifications

Hexagon Arena
574723

PRILUX


Specifications (Series luminaires)

Voltage (V)	220-400V
Frecuency (Hz)	50/60Hz
Current (A)	4.800mA
Power factor (Cos fi)	0.99
LED number	288
Dimming	DMX
IP Tightness index	IP66
IK Impact resistance	IK09
Diffuser Material	VT-T 4MM
Colour temperature	6000K
CRI Colour rendering index	>90
Optical	S066I2P
Higher Hemispheric Flow	0,0%

Measures	0x0x0mm
Operating temperature	-30°C ~ +35°C
Surges protection	No
Flux (lm)	75,588lm
Electrical isolation	CI
Lifetime	L90B10>154.000H

Prilux guarantees a ± 10% tolerance in light flux measurements.

Dimensions




References

		W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}	ϕ/W			
574723	2X	635W	678W	4800mA	99772lm	85302lm	75588lm	111lm/W	288	S066I2P	Yes

Hexagon Arena
574723

PRILUX

Photometry

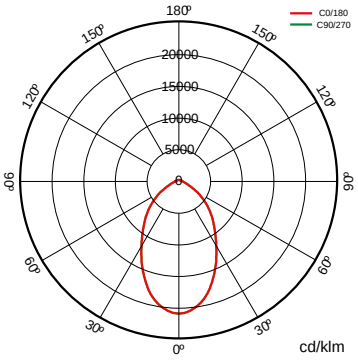

On request

Dali	S037I2P
	S090I2P