Hexagon Arena

574761

PRILUX

MADE IN SPAIN
Design by PRILUX



Applications

Sports grounds

Certifications

Hexagon Arena
574761

PRILUX


Specifications (Series luminaires)

Voltage (V)	220-400V
Frecuency (Hz)	50/60Hz
Current (A)	6.600mA
Power factor (Cos fi)	0.99
LED number	432
Dimming	DMX
IP Tightness index	IP66
IK Impact resistance	IK09
Diffuser Material	VT-T 4MM
Colour temperature	6000K
CRI Colour rendering index	>90
Optical	S066I2P
Higher Hemispheric Flow	0,0%

Measures	0x0x0mm
Operating temperature	-30°C ~ +35°C
Surges protection	No
Flux (lm)	105,770lm
Electrical isolation	CI
Lifetime	L90B10>154.000H

Prilux guarantees a ± 10% tolerance in light flux measurements.

Dimensions




References

574761	3X	900W	928W	6600mA	138225lm	119290lm	105770lm	114lm/W	432	S066I2P	Yes

Hexagon Arena
574761

PRILUX

Photometry

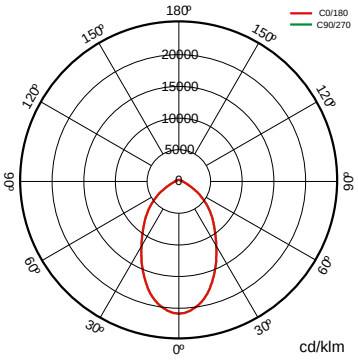

On request

Dali	S037I2P
	S090I2P