




MADE IN SPAIN  
Design by PRILUX



## Applications




Facades



Industrial




Car parks



Sports grounds



Monuments




















Industrial Zones

## Certifications




## Specifications (Series luminaires)

 <b>Voltage (V)</b>	220-240V
<b>Hz</b> <b>Frecuency (Hz)</b>	50-60Hz
 <b>Current (A)</b>	350mA
$\phi$ <b>Power factor (Cos fi)</b>	0.93
 <b>LED number</b>	108
 <b>Dimming</b>	No
 <b>IP Tightness index</b>	IP66
 <b>IK Impact resistance</b>	IK09
 <b>Body color</b>	9007
 <b>Body</b>	AL iap
<b>K</b> <b>Colour temperature</b>	3000K
 <b>CRI Colour rendering index</b>	70cromatica
 <b>Optical</b>	S090I2P






 <b>Measures</b>	500x250x55mm
 <b>Weight</b>	5.75Kg
 <b>Wind Resistance</b>	0,11m2
 <b>Operating temperature</b>	50°C
 <b>Surges protection</b>	No
$\phi_{LUM}$ <b>Flux (lm)</b>	6511lm
 <b>Electrical isolation</b>	CCI
 <b>Lifetime</b>	L70B10>100.000h

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.


## Dimensions




## References

	$W_{LED}$	$W$		$\phi$	$\phi_{LED}$	$\phi_{LUM}$	$\phi/W$			
<b>575454</b>	35W	38W	350mA	7593lm	7484lm	6511lm	171lm/W	108	S090I2P	No

Photometry

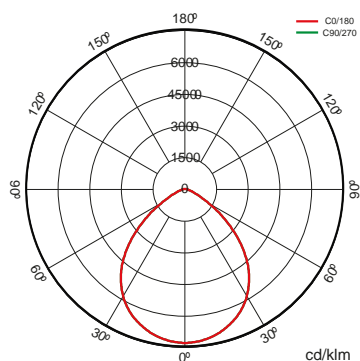

On request



Class II




Double Level with Line of Command



Available RAL colors (Consult)

5N



K

>70 2.700K

>70 5.000K

>80 3.000K

>80 4.000K

>80 4.000K

>70 2.700K



lm

S025I2P



S055I2P

VA11I2P

VA12I2P

**Light packages**



			PCA	722	727	730	827	830	840
W			$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$	$\phi_{LUM}$ $\phi/W$
<b>38W</b>	108	350mA				1lm 1lm/W	5.305lm 140lm/W	5.546lm 146lm/W	6.028lm 159lm/W

**Accessories**



**515788**

ACCESSORY  
PARALUMEN  
NANTES RAL9005T



## **Cora Manager**

### **description**



Lighting management in the electrical panel that allows group control of the luminaires connected to the control center via the power line (CMR) without additional wiring

### **Info**



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)