




MADE IN SPAIN
Design by PRILUX



Applications




Facades



Industrial



Car parks



Sports grounds



Monuments





















Industrial Zones

Certifications




Specifications (Series luminaires)






 Voltage (V)	220-240V	 Measures	500x250x55mm
Hz Frecuency (Hz)	50-60Hz	 Weight	5.75Kg
 Current (A)	700mA	 Wind Resistance	0,11m2
ϕ Power factor (Cos fi)	0.97	 Operating temperature	50°C
 LED number	108	 Surges protection	No
 Dimming	No	 Flux (lm)	12182lm
 IP Tightness index	IP66	 Electrical isolation	CCI
 IK Impact resistance	IK09	 Lifetime	L70B10>100.000h
 Body color	9007		
 Body	AL iap		
K Colour temperature	3000K		
 CRI Colour rendering index	70cromatica		
 Optical	S090I2P		

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions




References

	W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}	ϕ/W			
575485	73W	79,1W	700mA	14160lm	14002lm	12182lm	154lm/W	108	S090I2P	No

Photometry

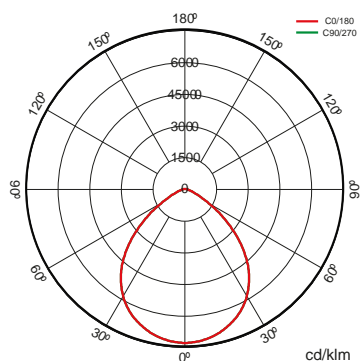

On request



Class II




Double Level with Line of Command



Available RAL colors (Consult)

5N



K

>70 2.700K

>70 5.000K

>80 3.000K

>80 4.000K

>80 4.000K

>70 2.700K



lm

S025I2P



S055I2P

VA11I2P

VA12I2P

Light packages



			PCA	722	727	730	827	830	840
W			ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W	ϕ_{LUM} ϕ/W
79,1W	108	700mA					9.926lm 126lm/W	10.377lm 131lm/W	11.279lm 143lm/W

Accessories



515788

ACCESSORY
PARALUMEN
NANTES RAL9005T

Solutions

S



**Cora
Manager**

description



Lighting management in the electrical panel that allows group control of the luminaires connected to the control center via the power line (CMR) without additional wiring

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es