





MADE IN SPAIN
Design by PRILUX



Applications



Offices



Classrooms



Retail



Large surfaces



Hotels




















Restaurants



Health care


Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	300mA
ϕ	Power factor (Cos fi)	0.97
	LED number	112
	Dimming	No
	IP Tightness index	IP20
	IK Impact resistance	IK04
	Diffuser Material	PC metalizado por altovacio
	Body	FE
	Reflector	AL-BR
K	Colour temperature	4.000K
	CRI Colour rendering index	>80
	UGR	UGR <19




	Measures	295x1.195x40mm
	Weight	5.7Kg
	Mounting position	Empotrar
	Operating temperature	+35°C
ϕ_{LUM}	Flux (lm)	3.879lm
	Electrical isolation	CI
	Lifetime	L80B10>150.000h L90B10>74.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

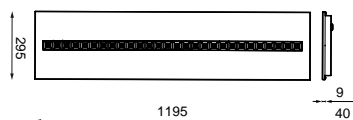
Dimensions



References

	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	K	
575720	24W	26W	300mA	4.345lm	3.879lm	4.000K	295x1.195x40mm

Photometry

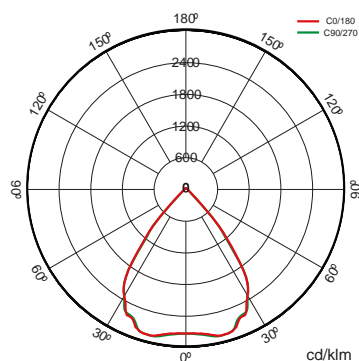

On request



Bluetooth



Available RAL colors (Consult)

K

>80 3.000K

>80 4.000K

>80 4.000K

Others (consult)



AL-MT (matt aluminium)

DO-MT (Matt gold)

CO-MT (Copper matt)

NE-MT (Matt black)

Solutions

S



CTE Pack

description

Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



Was Indoor

description

The WAS INDOOR solution is specifically aimed at increasing the well-being of users in places such as hospitals, nursing homes, wellness centres, classrooms and offices. The circadian lighting is applied in workplaces to improve visual conditions, comfort and the workers' performance, resulting in a higher productivity and a better development of the company.



Bluetooth package

description

Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info

i

Led module