




Specifications (Series luminaires)


	Electrical isolation	CII
	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	> 0,9
	IP Tightness index	IP20
	Body color	Black
K	Colour temperature	3.000K
	CRI Colour rendering index	>90
	Opening angle	36°
	Measures	Ø60x168x197mm
	Mounting position	Montaje en Carril
	Flux (lm)	1.851lm
	Lifetime	(L70B50>) 30.000h

References					
	W	ϕ_{LUM}	K		
580168	18W	1.851lm	3.000K	Black	Ø60x168x197mm

Dimensions

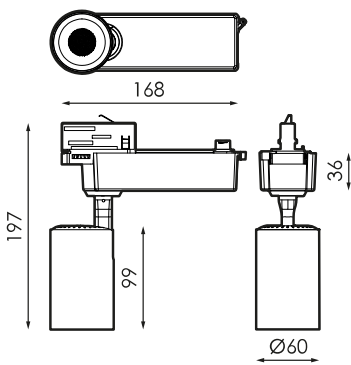

Photometry

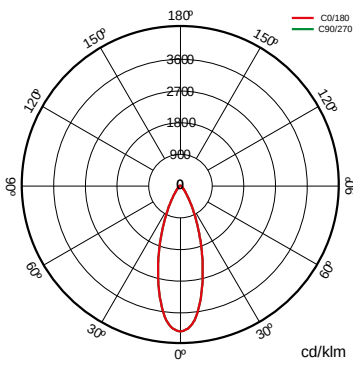

Accessories



210034

ELECTRIFIED RAIL
3M BLACK



210041

ELECTRIFIED RAIL
2M BLACK



381741

ELECTRIFIED RAIL 1M
BLACK



210096

POWER SUPPLY
ELECTR. BLACK SIDE
RAIL



210058

EXT CONNECTOR IN
"L" BLACK
ELECTRICAL RAIL



210065

EXT BLACK LINEAR
CONNECTOR
ELECTRICAL RAIL



210089

INT BLACK LINEAR
CONNECTOR
ELECTRICAL RAIL



210072

BLACK END COVER
FOR RAIL

Info



Three-phase electrified rail and accessories in white, black and grey. Adapter for three phase track 250V 6A.