



Applications



Fairgrounds












Facades






Historic buildings



Cultural spaces


Specifications (Series luminaires)

	Voltage (V)	24 dcV
Hz	Frecuency (Hz)	50-60Hz
	LED number	18
	Dimming	DMX
	IP Tightness index	IP66
	IK Impact resistance	IK09
	Body color	9007
	Diffuser Material	VT
	Body	AL
K	Colour temperature	RGBW
	CRI Colour rendering index	>80 (Blanco)




	Measures	300x76,5mm
	Surges protection	No
	Flux (lm)	1.016lm
	Electrical isolation	CIII
	Lifetime	L70>50.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References

	W_{LED}	ϕ_{LED}	ϕ_{LUM}		
581271	8W	490,31m	1.016lm	18	Yes

Photometry

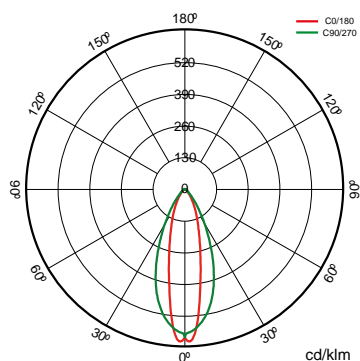

Accessories



516013

CONECTOR T DMX
LED PAD AVANT
RGBW



516020

EXTENSION 3M 5PIN
DMX LED PAD
AVANT RGBW



391535

EXTENSION FUENTE
DE ALIMENTACION
0,5 BL



588911

EXTENSION FUENTE
DE ALIMENTACION
0,5 NG

Accessories



588928

EXTENSION FUENTE
DE ALIMENTACION
1M NG



529327

EXTENSION 0.5M
5PIN DMX LED PAD
AVANT RGBW



565325

TAPON FINAL
ALUMINIO LED PAD
AVANT RGBW



588942

POWER SUPPLY
EXTENSION 5M NG

Rules



Without remote control. RGB with memory effect.

Info



Do not connect more than 8 luminaires in series