



MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades


















Historic buildings



Cultural spaces


Specifications (Series luminaires)



 Voltage (V)	220-240V	 Measures	215x140x120mm
Hz Frecuency (Hz)	50-60Hz	 Weight	0.002Kg
 Current (A)	3.400mA	 Wind Resistance	0,018m2
ϕ Power factor (Cos fi)	0.95		
 LED number	12	 Operating temperature	-20~+50°C
 Dimming	DMX (RDM)		
		 Surges protection	No
 Body color	9007		
 Body	FE (G.OP.Tanek) PS (Box Tanek)	ϕ_{LUM} Flux (lm)	2.035lm
K Colour temperature	RGBW(W:4000K)	 Electrical isolation	CI
 CRI Colour rendering index	>80 (Blanco)		
 Optical	S094IIP	 Lifetime	L90B10>184.000h






Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions




References



	W_{LED}		ϕ_{LED}	ϕ_{LUM}			
583008	29 máx.	3400mA	2.438lm	2.035lm	12	TARG-S094IIP	Yes

Photometry

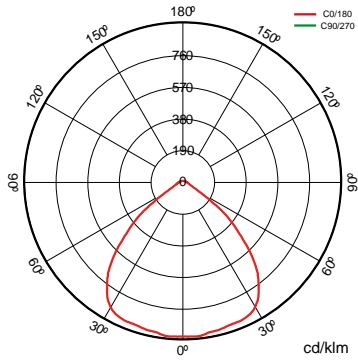

Accessories



523448

TANEK ARQ RGBW
3M CONNECTION KIT



527774

KIT CONEXION
TANEK ARQ RGBW
10M



561280

DMX TERMINATOR
120OHM

Info



The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in the luminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination adapted to your installation.