



MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades


















Historic buildings




Cultural spaces

Specifications (Series luminaires)









 Voltage (V)	220-240V	 Measures	215x140x120mm
Hz Frecuency (Hz)	50-60Hz	 Weight	0.002Kg
 Current (A)	4.000mA	 Wind Resistance	0,018m2
ϕ Power factor (Cos fi)	0.95	 Operating temperature	-20~+50°C
 LED number	12	 Surges protection	No
 Dimming	DMX (RDM)	 Flux (lm)	2.035lm
 Body	FE (G.OP.Tanek) PS (Box Tanek)	 Electrical isolation	CI
K Colour temperature	RGBW(W:4000K)	 Lifetime	L90B10>184.000h
 CRI Colour rendering index	>80 (Blanco)		
 Optical	S094IIP		

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References

							
583015	29 máx.	4000mA	2.438lm	2.035lm	12	TARG-S094IIP	Yes

Photometry

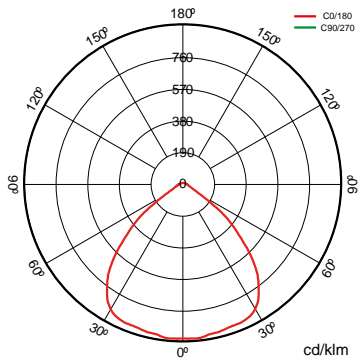

Accessories



523448

TANEK ARQ RGBW
3M CONNECTION KIT



527774

KIT CONEXION
TANEK ARQ RGBW
10M



561280

DMX TERMINATOR
120OHM

Info



The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in the luminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination adapted to your installation.