Tanek Arq Rgbw

583039

PRILUX

MADE IN SPAIN
Design by PRILUX

Applications

Monuments

Fairgrounds

Facades

Historic buildings

Cultural spaces

Tanek Arq Rgbw

583039

PRILUX

Specifications (Series luminaires)

Voltage (V)	220-240V
Frecuency (Hz)	50-60Hz
Current (A)	4.000mA
Power factor (Cos fi)	0.95
LED number	12
Dimming	DMX (RDM)
Body	FE (G.OP.Tanek) PS (Box Tanek)
Colour temperature	RGBW(W:4000K)
CRI Colour rendering index	>80 (Blanco)
Optical	S025I1P

Measures	215x140x120mm
Weight	0.002Kg
Wind Resistance	0,018m2
Operating temperature	-20~+50°C
Surges protection	No
Flux (lm)	1.823lm
Electrical isolation	CI
Lifetime	L90B10>184.000h

Prilux guarantees a ± 10% tolerance in light flux measurements.

Dimensions



References

583039	29 máx.	4000mA	2.438lm	1.823lm	12	TARG-S025I1P	Yes

Tanek Arq Rgbw
583039

Photometry

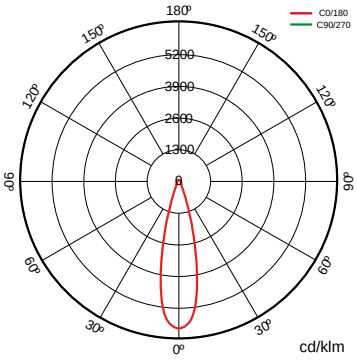

Accessories

523448

TANEK ARQ RGBW
3M CONNECTION KIT

527774

KIT CONEXION
TANEK ARQ RGBW
10M

561280

DMX TERMINATOR
120OHM

Info

The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in theluminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination a dapted to your installation.