



MADE IN SPAIN  
Design by PRILUX



## Applications



Monuments



Fairgrounds



Facades

















Historic buildings




Cultural spaces

## Specifications (Series luminaires)






	<b>Voltage (V)</b>	220-240V		<b>Measures</b>	215x140x120mm
Hz	<b>Frecuency (Hz)</b>	50-60Hz		<b>Weight</b>	0.002Kg
	<b>Current (A)</b>	4.000mA		<b>Wind Resistance</b>	0,018m2
$\phi$	<b>Power factor (Cos fi)</b>	0.95			
	<b>LED number</b>	12		<b>Operating temperature</b>	-20~+50°C
	<b>Dimming</b>	DMX (RDM)			
		<b>Body</b>	FE (G.OP.Tanek) PS (Box Tanek)		
K	<b>Colour temperature</b>	RGBW(W:4000K)			
	<b>CRI Colour rendering index</b>	>80 (Blanco)			
	<b>Optical</b>	S059I1P			
				<b>Surges protection</b>	No
			$\phi_{LUM}$	<b>Flux (lm)</b>	2.019lm
				<b>Electrical isolation</b>	CI
				<b>Lifetime</b>	L90B10>184.000h

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.


## Dimensions



## References

	$W_{LED}$		$\phi_{LED}$	$\phi_{LUM}$			
<b>583053</b>	29 máx.	4000mA	2.438lm	2.019lm	12	TARG-S059I1P	Yes

## Photometry

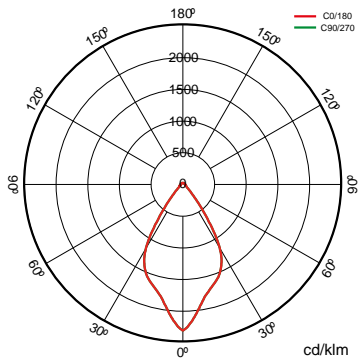

## Accessories



**523448**

TANEK ARQ RGBW  
3M CONNECTION KIT



**527774**

KIT CONEXION  
TANEK ARQ RGBW  
10M



**561280**

DMX TERMINATOR  
120OHM

## Info



The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in the luminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination adapted to your installation.