



MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades



















Historic buildings




Cultural spaces

Specifications (Series luminaires)









 Voltage (V)	220-240V	 Measures	215x140x120mm
Hz Frecuency (Hz)	50-60Hz	 Weight	0.002Kg
 Current (A)	4.000mA	 Wind Resistance	0,018m2
ϕ Power factor (Cos fi)	0.95		
 LED number	12	 Operating temperature	-20~+50°C
 Dimming	DMX (RDM)		
		 Surges protection	No
 Body color	9007	 Flux (lm)	1.858lm
 Body	FE (G.OP.Tanek) PS (Box Tanek)		
K Colour temperature	RGBW(W:4000K)	 Electrical isolation	CI
 CRI Colour rendering index	>80 (Blanco)		
 Optical	S1511IP	 Lifetime	L90B10>184.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References

							
583060	29 máx.	4000mA	2.438lm	1.858lm	12	TARG-S1511IP	Yes

Photometry

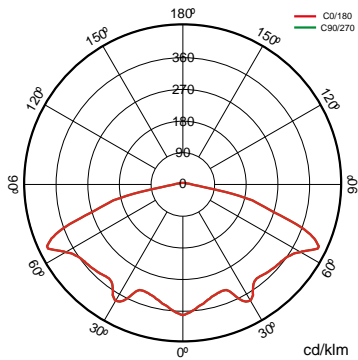

Accessories



523448

TANEK ARQ RGBW
3M CONNECTION KIT



527774

KIT CONEXION
TANEK ARQ RGBW
10M



561280

DMX TERMINATOR
120OHM

Info



The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in the luminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination adapted to your installation.