

MADE IN SPAIN
Design by PRILUX




Applications



Monuments



Fairgrounds



Facades
















Historic buildings




Cultural spaces

Specifications (Series luminaires)






| | | | | | |
|---|-----------------------------------|--------------------------------|---|------------------------------|-----------------|
|  | Voltage (V) | 220-240V |  | Measures | 215x140x120mm |
| Hz | Frecuency (Hz) | 50-60Hz |  | Weight | 0.002Kg |
|  | Current (A) | 4.000mA |  | Wind Resistance | 0,018m2 |
| ϕ | Power factor (Cos fi) | 0.95 | | | |
|  | LED number | 12 |  | Operating temperature | -20~+50°C |
|  | Dimming | DMX (RDM) | | | |
| Body | | FE (G.OP.Tanek) PS (Box Tanek) |  | Surges protection | No |
| K | Colour temperature | RGBW(W:4000K) | ϕ_{LUM} | Flux (lm) | 1.858lm |
|  | CRI Colour rendering index | >80 (Blanco) |  | Electrical isolation | CI |
|  | Optical | S1511P |  | Lifetime | L90B10>184.000h |

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References

| | | | | | | | |
|---|-----------|---|--------------|--------------|---|---|---|
|  | W_{LED} |  | ϕ_{LED} | ϕ_{LUM} |  |  |  |
| 583077 | 29 máx. | 4000mA | 2.438lm | 1.858lm | 12 | TARG-S1511P | Yes |

Photometry

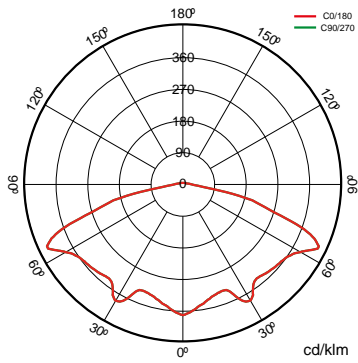

Accessories



523448

TANEK ARQ RGBW
3M CONNECTION KIT



527774

KIT CONEXION
TANEK ARQ RGBW
10M



561280

DMX TERMINATOR
120OHM

Info



The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in the luminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination adapted to your installation.