





Applications



Offices



Classrooms



Retail



Home



Large surfaces



Hotels











Restaurants







Health care

Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	700mA
	Dimming	DALI

	IP Tightness index	IP20
	IK Impact resistance	IK0
	Body color	White
	Diffuser Material	AL-AN
	Body	AL

K	Colour temperature	3.000K/4.000K
	CRI Colour rendering index	>80
	UGR	UGR <19

	Measures	Ø174x88,8mm
	Mounting position	Empotrar


	Flux (lm)	1.697/1.818lm
---	------------------	---------------

	Electrical isolation	CII
---	-----------------------------	-----







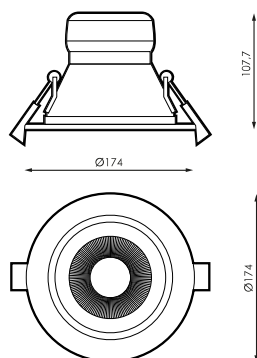


	Lifetime	L70>40.000h
---	-----------------	-------------

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References


								
585316	18W	20W	700mA	2.156/2.244lm	1.697/1.818lm	50°	3.000K/4.000K	Ø174x88,8mm

Photometry

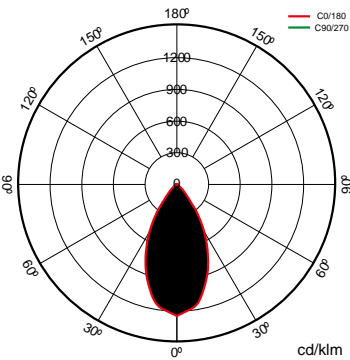


On request






Dali



Bluetooth




Emergency kit

Solutions

S




CTE Pack

description

Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.




Bluetooth package

description


Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color,scene configuration, behavior linked to schedules. Multiple accessories can be configured to work onthe same network to unify the control of one ormore spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.



CLASSROOMS Pack

description

Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info



You need DALI drive