























**Specifications (Series luminaires)**




	<b>Electrical isolation</b>	CII
	<b>Voltage (V)</b>	230V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP65
	<b>IK Impact resistance</b>	IK08
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	PC
<b>K</b>	<b>Colour temperature</b>	3.000K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	127°
	<b>Measures</b>	271x46x72mm
	<b>Operating temperature</b>	-10°C~+35 °C
	<b>Flux (lm)</b>	1.881lm
	<b>Lifetime</b>	(L70B50>) 25.000h

**References**



	W	$\phi_{LUM}$	K					
<b>586115</b>	18W	1.881lm	3.000K	White	>80	(L70B50>) 25.000h	127°	271x46x72mm

**Dimensions**

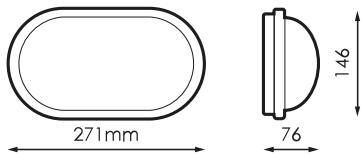

**Photometry**

