



MADE IN SPAIN  
Design by PRILUX



### Applications



Monuments



Fairgrounds



Facades



Historic buildings



















Cultural spaces

### Certifications




## Specifications (Series luminaires)

	<b>Voltage (V)</b>	220-240V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Current (A)</b>	700mA
$\phi$	<b>Power factor (Cos fi)</b>	0.98
	<b>LED number</b>	40
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP66
	<b>IK Impact resistance</b>	IK10
	<b>Body</b>	AL iap
K	<b>Colour temperature</b>	RGBW(W:4000)
	<b>CRI Colour rendering index</b>	RGBW(W:4000)
	<b>Optical</b>	PEXL0M






	<b>Measures</b>	452x174x321mm
	<b>Weight</b>	9Kg
	<b>Operating temperature</b>	50°C
	<b>Surges protection</b>	No
$\phi_{LUM}$	<b>Flux (lm)</b>	5554lm
	<b>Electrical isolation</b>	CCI
	<b>Lifetime</b>	L90B10>184.000h
	<b>Lifetime</b>	L90B10>184.000h

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.

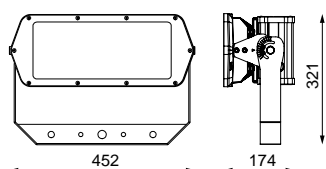
## Dimensions



## References

	$W_{LED}$	W		$\phi$	$\phi_{LED}$	$\phi_{LUM}$			
<b>586344</b>	82W	92W	700mA	-lm	6653lm	5554lm	40	PEXL0M	No

## Photometry

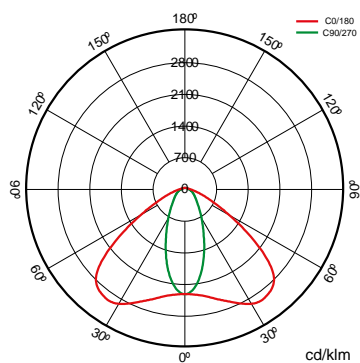

## On request



Bluetooth



AEXLOM

AINLOM

PINLOM

S014LOM

S025LOM

S074LOM

S137LOM

S154LOM

## Accessories



**452311**

ACCES. MOBILE FINS  
1X120LED HEXAGON



**452335**

ACCESORIO VISERA  
1X120LED HEXAGON



**452670**

RGBW 3MTS  
REMOTE HEXAGON  
CONNECTION KIT



**452687**

KIT CONEXION  
HEXAGON REMOTO  
RGBW 5M



**471428**

KIT CONEXION  
HEXAGON REMOTO  
RGBW 7M



**471596**

KIT CONEXION  
HEXAGON REMOTO  
RGBW 10M