



MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades



Historic buildings



Cultural spaces

Certifications






Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	700mA
ϕ	Power factor (Cos fi)	0.98
	LED number	40
	Dimming	No
	IP Tightness index	IP66
	IK Impact resistance	IK10
	Body	AL iap
K	Colour temperature	RGBW(W:4000)
	CRI Colour rendering index	RGBW(W:4000)
	Optical	PEXL0M

	Measures	452x174x321mm
	Weight	9Kg
	Operating temperature	50°C
	Surges protection	No
ϕ_{LUM}	Flux (lm)	5554lm
	Electrical isolation	CCI
	Lifetime	L90B10>184.000h
	Lifetime	L90B10>184.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions

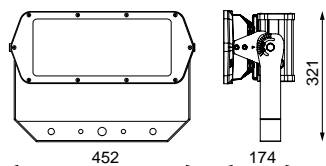

References

	W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}			
586351	82W	92W	700mA	-lm	6653lm	5554lm	40	PEXL0M	No

Photometry

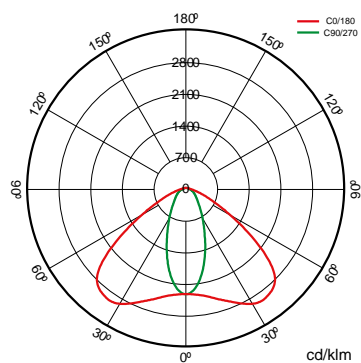

On request



Bluetooth



AEXLOM

AINLOM

PINLOM

S014LOM

S025LOM

S074LOM

S137LOM

S154LOM

Accessories



452311

ACCES. MOBILE FINS
1X120LED HEXAGON



452335

ACCESORIO VISERA
1X120LED HEXAGON



452670

RGBW 3MTS
REMOTE HEXAGON
CONNECTION KIT



452687

KIT CONEXION
HEXAGON REMOTO
RGBW 5M



471428

KIT CONEXION
HEXAGON REMOTO
RGBW 7M



471596

KIT CONEXION
HEXAGON REMOTO
RGBW 10M