

MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades



Historic buildings



















Cultural spaces

Certifications




Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	700mA
ϕ	Power factor (Cos fi)	0.98
	LED number	80
	Dimming	No
	IP Tightness index	IP66
	IK Impact resistance	IK10
	Body	AL iap
K	Colour temperature	RGBW(W:4000)
	CRI Colour rendering index	RGBW(W:4000)
	Optical	PEXL0M






	Measures	476x174x479mm
	Weight	17Kg
	Operating temperature	50°C
	Surges protection	No
ϕ_{LUM}	Flux (lm)	11108lm
	Electrical isolation	CCI
	Lifetime	L90B10>184.000h
	Lifetime	L90B10>184.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

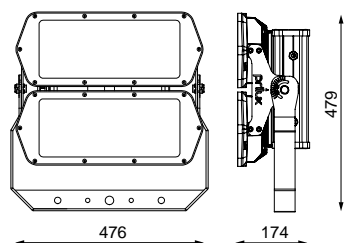
Dimensions



References

	W_{LED}	W		ϕ	ϕ_{LED}	ϕ_{LUM}			
586382	164W	184W	700mA	-lm	13306lm	11108lm	80	PEXL0M	No

Photometry

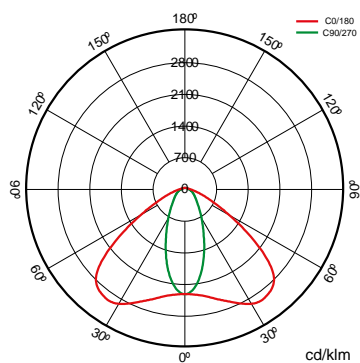

On request



Bluetooth



AEXLOM

AINLOM

PINLOM

S014LOM

S025LOM

S074LOM

S137LOM

S154LOM

Accessories



452311

ACCES. MOBILE FINS
1X120LED HEXAGON



452335

ACCESORIO VISERA
1X120LED HEXAGON



452670

RGBW 3MTS
REMOTE HEXAGON
CONNECTION KIT



452687

KIT CONEXION
HEXAGON REMOTO
RGBW 5M



471428

KIT CONEXION
HEXAGON REMOTO
RGBW 7M



471596

KIT CONEXION
HEXAGON REMOTO
RGBW 10M