

Hexagon Rgbw Rssy

586405

PRILUX



MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades














Historic buildings







Cultural spaces




Specifications (Series luminaires)

| | | |
|--|-----------------------------------|---------------|
|  | Voltage (V) | 220-240V |
| Hz | Frecuency (Hz) | 50-60Hz |
|  | Current (A) | 700mA |
| ϕ | Power factor (Cos fi) | 0.98 |
|  | LED number | 40 |
|  | Dimming | No |
|  | IP Tightness index | IP66 |
|  | IK Impact resistance | IK10 |
|  | Body color | 9007 |
|  | Diffuser Material | PC-T |
|  | Body | AL iap |
| K | Colour temperature | RGBW(W:4000K) |
|  | CRI Colour rendering index | >80 (Blanco) |
|  | Optical | PEXL0M |








| | | |
|---|-----------------------------|-----------------|
|  | Measures | 452x174x321mm |
|  | Surges protection | No |
| ϕ_{LUM} | Flux (lm) | 5.554lm |
|  | Electrical isolation | CI |
|  | Lifetime | L90B10>184.000h |

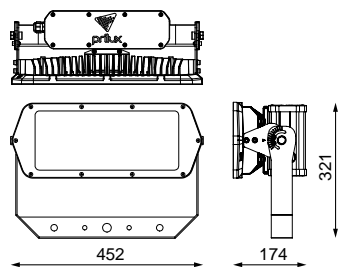Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions




References

| | | | | | | | | |
|---|---|---|---|--------------|--------------|---|---|---|
|  |  |  |  | ϕ_{LED} | ϕ_{LUM} |  |  |  |
| 586405 | Lira IX | 82 máx. | 700mA | 6.653lm | 5.554lm | 40 | HERRO40-PEXL0M | No |



Photometry

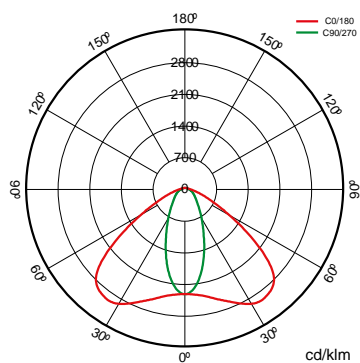

On request



Bluetooth



AEXLOM

AINLOM

PINLOM

S014LOM

S025LOM

S074LOM

S137LOM

S154LOM

Accessories



452311

ACCES. MOBILE FINS
1X120LED HEXAGON



452335

ACCESORIO VISERA
1X120LED HEXAGON



452670

KIT CONEXION
HEXAGON REMOTO
RGBW 3MTS



452687

KIT CONEXION
HEXAGON REMOTO
RGBW 5MTS



471428

KIT CONEXION
HEXAGON REMOTO
RGBW 7MTS



471596

KIT CONEXION
HEXAGON REMOTO
RGBW 10MTS



Solutions

S



Cora Sport

description



CORA SPORTS is the family of devices by Priluxto control DALI light fixtures in new or existing installations, indoors or outdoors, using Bluetooth5.0 wireless technology. Technology that is more efficient and easier to deploy and scale for professional lighting applications. It can work in a meshed arrangement with the light fixtures and to create smart communication networks. Especially recommended in installations with towers and/or groups of light fixtures to make it possible to operate them as a group or individually.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info



You need DALI drive